




Thank you for choosing Better Bathrooms.
Please read this manual before installing your product
and keep for future reference.

better 
bathrooms

WALL MOUNTED LED MIRRORED CABINET WITH SHAVER SOCKET

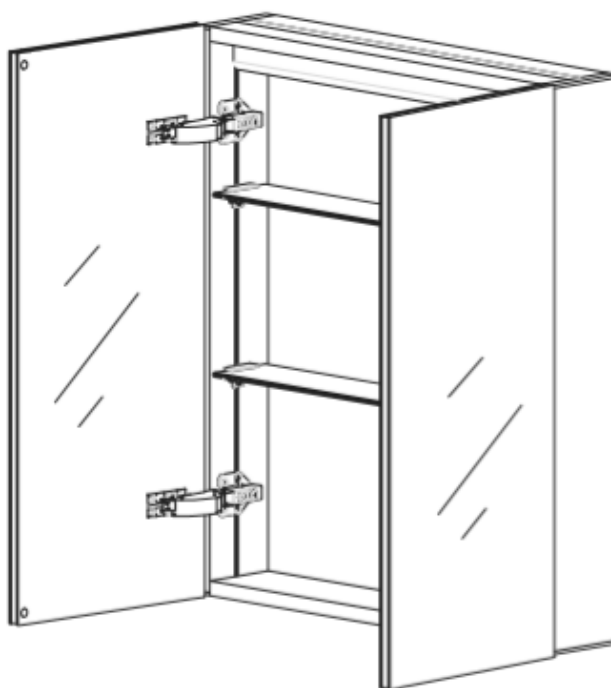

BeBa_26152

BeBa_27589

- TOUCH CONTROL
- ADJUSTABLE STAINLESS-STEEL BUFFER HINGE
- IP44 INGRESS PROTECTION
- ALUMINIUM ALLOY CABINET

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products for less.

If you're after a modern, traditional, or totally unique bathroom style, we have the fittings and fixtures to bring your ideas to life so you can fall in love with your space every day.

We hope your new product goes above and beyond your expectations. However, should any problems occur, please:

- Log in to your account and contact our customer services team via your self-service portal – betterbathrooms.com/CustomerAccount/Login
- Contact us via betterbathrooms.com/contact/contact-us

CONTENTS


SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
INSTALLING THE CABINET	6
DOOR ADJUSTMENT	7
SHELF ADJUSTMENT	7
OPERATION	8
CLEANING AND MAINTENANCE	8
LIGHT REPLACEMENT	8
TECHNICAL SPECIFICATIONS	10

SAFETY

- This cabinet should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220- 240V~ earthed supply in accordance with current IEE wiring regulations and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit, which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).
- The electrical connection must be an adequate distance from the rear of the cabinet to prevent the risk of shorting with the cabinet's casing.
- Before installing the fitting, ensure the mains supply is switched off and that the appropriate fuse is removed (or the appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a "Minimum Distance" Label, please do not allow Flammable Materials to rest within that distance from the unit.
- This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.
- Ensure the cover for the shaver socket is closed when not in use to prevent moisture from entering it.
- Only connect items designed to be used with a shaver socket (such as shavers or electric toothbrushes).
- The shaver socket is not earthed and provides 230V at a maximum current of 80mA. Do not connect devices which require a higher current, a different voltage, or an earth connection.
- Any modification to the fitting will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause an electric shock. Never switch on a defective or damaged appliance. Disconnect the appliance from the mains before seeking assistance.
- This product is IP44 rated, and no part of the installation is allowed to be within bathroom Zones 0 or 1. Installation is permitted within Zone 2.
- This product must be earthed. Before commencing installation, ensure that there are no pipes or wires located behind the wall that may be damaged during drilling.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Inspect the cabinet to ensure there are no signs of damage prior to installation.
- Take care of unpacking, and do not use a sharp blade to open it, as this may damage the mirror and void your warranty.
- Installation must only be carried out by a qualified professional or electrician.
- Once installed, silicone can be applied between the cabinet and the wall around the unit. Don't seal the bottom of the cabinet, as this may allow water to accumulate behind it.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer, his service agent or a similarly qualified person in order to avoid a hazard.
- This product contains a light source of energy efficiency class F and the light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.
- The control gear of this luminaire shall only be replaced by a professional service engineer or a similar qualified person.


BATHROOM ZONES

If the appliance is to be fitted within a bathroom, a good understanding of the zoning within bathrooms is required to ensure the unit is mounted in a safe position. The appliance is rated as IPX4 and should be installed outside of Zones 0 -2. We would advise that when the unit is fitted within a bathroom, the plug is removed from the unit, and a suitable fused spur is installed in accordance with BS 7671. In addition, when used in a bathroom, it must be protected by a suitable RCD to prevent the risk of electric shock, and it must not be immersed in water during cleaning.

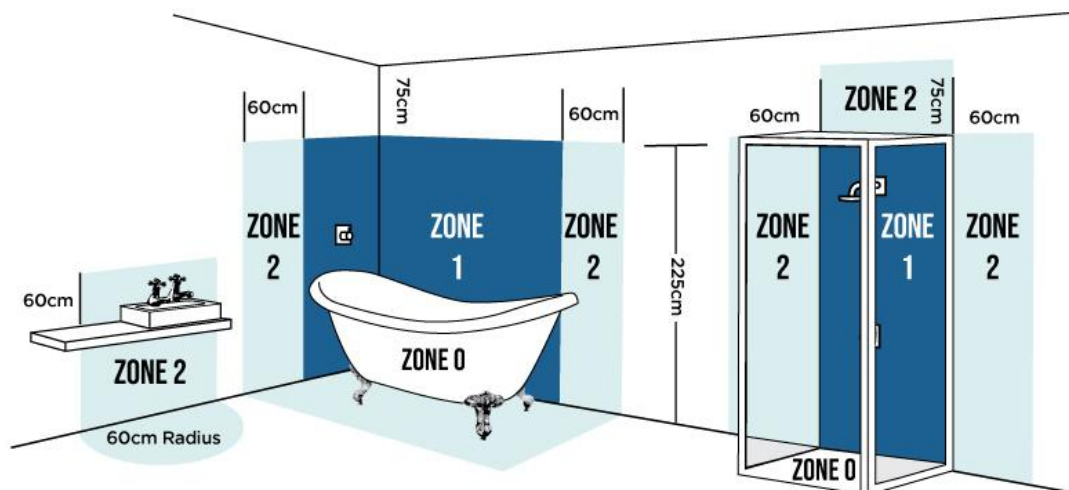

Zone 0:	The interior of the bathtub or shower basin.
Zone 1:	The area around the bathtub or shower basin up to a height of 2.25m above the floor
Zone 2:	The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m


PARTS SUPPLIED



WALL PLUGS (X4)




SCREWS M4 (X4)




ALUMINIUM MOUNTING BAR (X1)

PLEASE NOTE: It is the installer's responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure, professional advice should be sought.


TOOLS REQUIRED




TAPE MEASURE




SPIRIT LEVEL




ELECTRIC DRILL




SCREWDRIVER



HAMMER



8mm DRILL BIT



PENCIL


INSTALLATION

The cabinet is supplied with an aluminium mounting bar for wall mounting. At the back of the cabinet, there is a corresponding bar which is designed to slot onto the hanging bar.


IMPORTANT INFORMATION

- Before commencing installation, ensure that there are no pipes or wires located behind the wall that you will be drilling into. The depth of the holes required for hanging is approximately 50mm.
- The power must be disconnected when installing and performing any maintenance.
- Ensure that the hanging location has been decided upon and marked clearly to avoid unwanted damage to the wall due to incorrect positioning.
- Check that the mirror is not damaged prior to installation.
- Take care of unpacking, and do not use a sharp blade to open it, as this may damage the mirror and void your warranty.

1. Choose the desired position of the cabinet, and from that, determine the required position of the aluminium mounting bar.
2. Hold the aluminium mounting bar in position, using a spirit level to ensure it is level.
3. Use a pencil to mark the position of the 3 holes on the wall.
4. Place the aluminium mounting bar aside and drill the holes with a suitable drill bit.
5. Insert wall plugs into the holes, ensuring they are flush to the wall.
6. Place the mounting bar onto the wall, lining up the 3 holes with the wall plugs.
7. Secure the mounting bar to the wall using the supplied screws.
8. You will now be able to hang the cabinet. Carefully lower the cabinet onto the mounting bar, ensuring that it is secure and will not slide.




9. Open the cabinet door and mark the wall with a pencil through the security hole on the back panel.
10. Remove the cabinet, drill the hole, then place a wall plug into the hole you have just drilled.
11. Hang your cabinet back up onto the hanging bar and ensure that the in the cabinet is lined up with the wall plug.
12. The cabinet should now be connected to a suitable fused spur following current regulations and guidance. We would advise this to be situated directly behind the cabinet below the hanging bar. When connecting, ensure that enough cable is left to allow the cabinet to be safely removed from the hanging bar.
13. Secure the cabinet to the wall using a screw through the security hole and into the wall plug you previously installed.

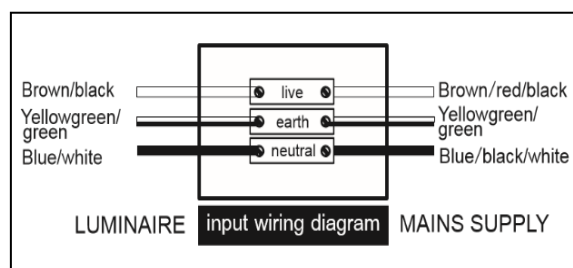


DOOR ADJUSTMENT

If the door is not level, you can adjust it using the hinge screw.

Turning the screw clockwise will push the door right, and turning anticlockwise will pull it right.

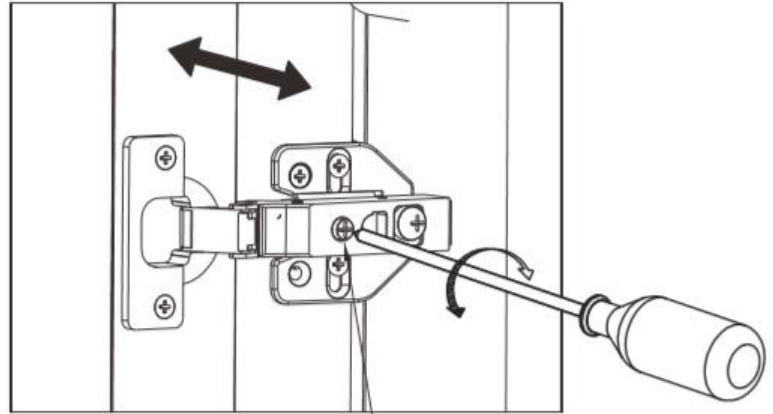


SHELF ADJUSTMENT

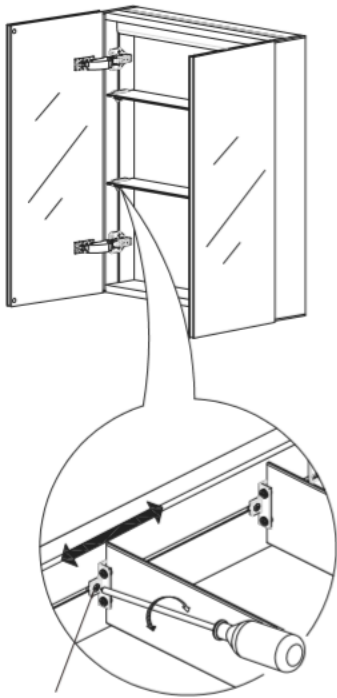

Loosen the snap screw on the shelf to adjust the shelf position.

Once the shelf is in the correct position and level, the screw should then be re-tightened.

OPERATION



Touch the button once to turn on the lights.

Touch the button again to turn the lights off.

SHAVER SOCKET

SHAVERS



ONLY

Your cabinet comes with an in-built shaver socket located inside the unit. This socket is only designed for use with shavers and other low-voltage items designed to be powered from a shaver socket.

Once the cabinet is connected to the mains, the shaver socket is ready to use.

CLEANING AND MAINTENANCE



Never use products containing bleach or abrasive cleaners, as these will have a detrimental effect on the appearance and lifespan of the product.

Use a clean microfiber cloth to clean the mirror.

LIGHT REPLACEMENT


This product contains a light source of energy efficiency class F and the light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.

The control gear of this luminaire shall only be replaced by a professional service engineer or a similar qualified person.




CONTROL GEAR REPLACEMENT INSTRUCTION


NOTE: Before carrying out any maintenance, servicing, or installation work on the mirror, ensure that the power supply is completely switched off and disconnected.

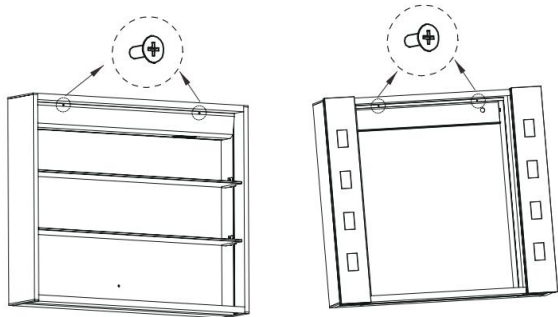


1. Unscrew the electrical box from the cabinet.

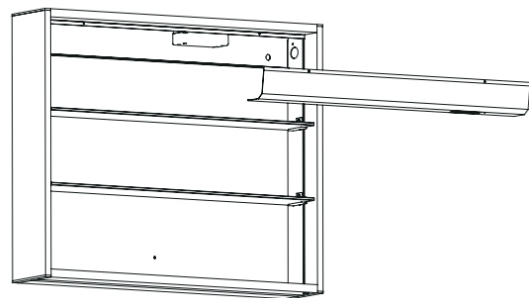


2. Remove the cover of the electrical box.




3. Unscrew the LED driver. Adjust it, or remove the glass shelf if necessary.



4. Remove the LED driver and replace it.

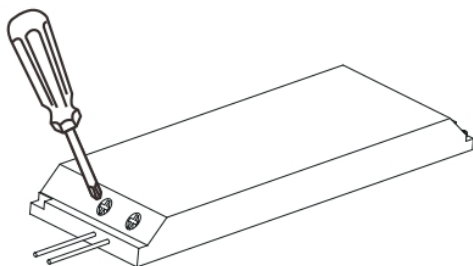

5. Unscrew both ends of the LED driver cover.

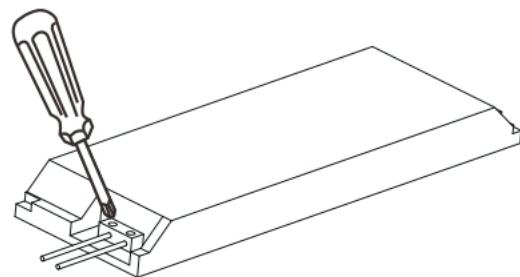

6. Disconnect the wires at both ends of the LED driver, then remove the LED driver.

DISPOSAL



Recycling facilities are now available for all customers, where you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please get in touch with the local council for details of your local household waste recycling centres.

At the time of printing, the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation, the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer, we monitor the regulations to ensure continued compliance. Further information can be provided upon request.

TECHNICAL SPECIFICATION

Model	BeBa_26152	BeBa_27589
WxHxD (mm)	800x700x135	600x700x135
Net Weight (Kg)	20.2	16
Power Cord length (cm)	100	80
Rated Power (W)	13	13
IP Rating	IP44	IP44
Input	220 - 240V, 50 Hz	220 - 240V, 50 Hz
Shaver Socket Output	230V, 50Hz, 80mA	230V, 50Hz, 80mA

For more information

- visit betterbathrooms.com
- email Support@Betterbathrooms.com
- call 0330 390 3062
- write to Trident Business Park, Neptune Way, Huddersfield, HD2 1UA

**better
bathrooms**

Part of the BuyItDirect Group