


Kitchen Faucet Installation

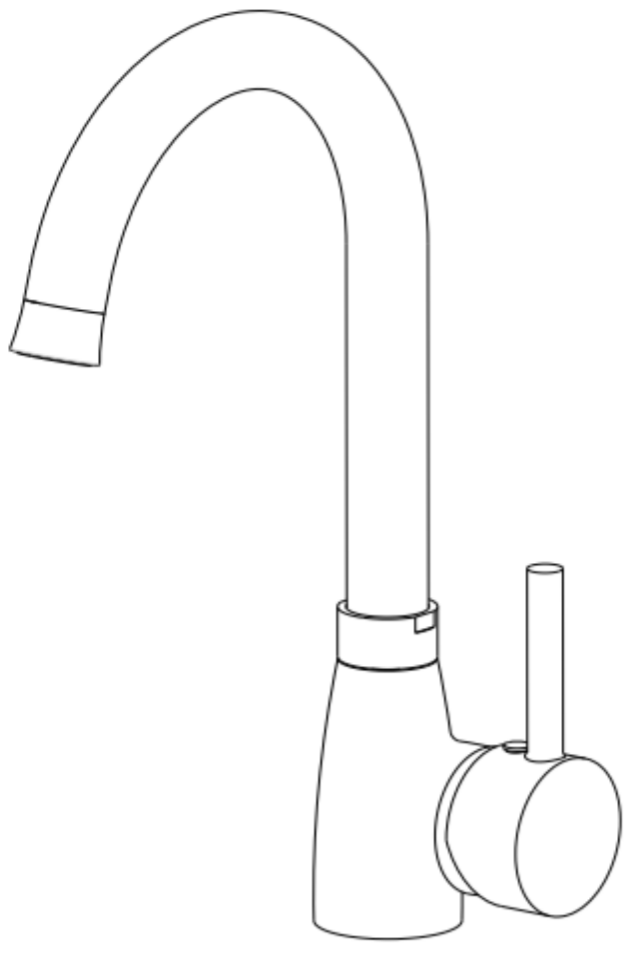

<p>Product Specification Minimum Pressure 0.5bar Maximum Pressure 6.0bar</p>	
<p>NOTE: ISOLATION VALVE NOT SUPPLIED</p>	
<p>Cleaning All surfaces should be cleaned using a clean damp cloth. No abrasive cleaning agents or materials should be used.</p>	
<p>Flexible Connecting Pipes Care must be taken when connecting the flexible connection pipes to the household pipework to ensure they do not bend sharply and kink or twist.</p>	
<p> </p>	
<p>Important: Failure to follow these guidelines may result in poor performance and damage to the flexible connecting pipes.</p>	

Locknut With Screw Fixing Kit

Horse Shoe Type Fixing Kit


Securing Collar Fixing Kit

Locknut Fixing Kit

Spring Load Pullout Spout

--	--

Pullout Kitchen Faucet Installation

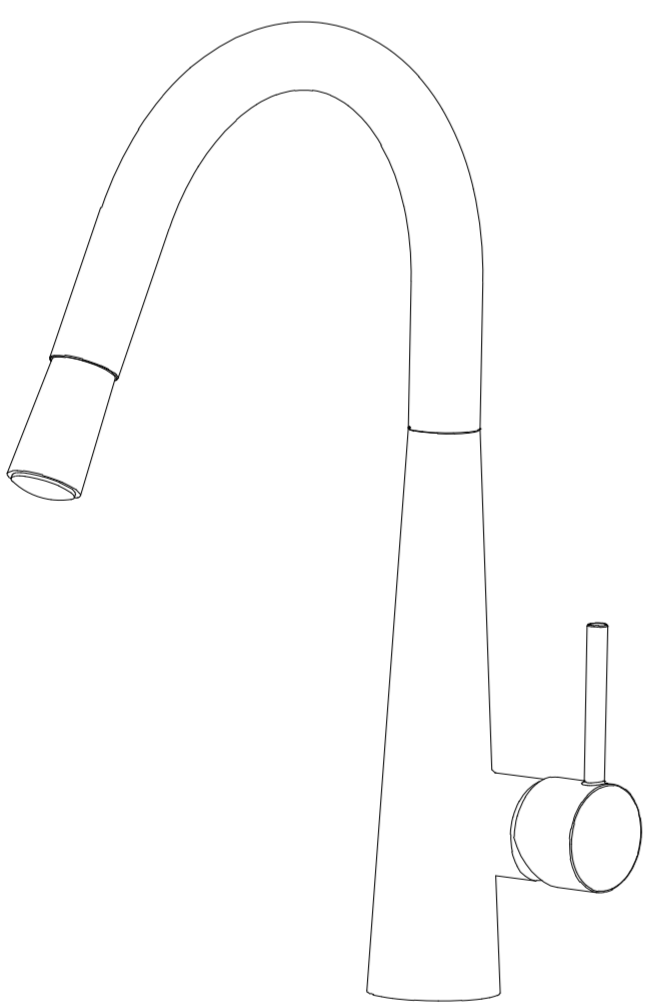

Two Leg Fixing
