

Inspiron 3472

Setup and Specifications

Computer Model: Inspiron 3472
Regulatory Model: D14S
Regulatory Type: D14S003



Notes, cautions, and warnings



NOTE: A NOTE indicates important information that helps you make better use of your product.



CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.



WARNING: A WARNING indicates a potential for property damage, personal injury, or death.

© 2018 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

2018-01

Rev. A00

Contents

Set up your computer.....	4
Create a USB recovery drive for Windows.....	8
Views.....	9
Front.....	9
Back.....	11
Specifications.....	13
Computer model.....	13
System information.....	13
Operating system.....	13
Dimensions and weight.....	14
Memory.....	14
Ports and connectors.....	15
Communications.....	15
Wireless.....	16
Audio.....	16
Storage.....	16
Media-card reader.....	17
Power adapter.....	17
Video.....	18
Computer environment.....	18
Getting help and contacting Dell.....	19
Self-help resources.....	19
Contacting Dell.....	20



Identifier	GUID-5DFD7D8F-D96D-4596-919F-2AE38255DFEF
Status	Released

Set up your computer

- 1 Connect the keyboard and mouse.



 **NOTE: For setup instructions, see the documentation shipped with the keyboard and mouse.**

- 2 Connect the network cable—Optional.



3 Connect the display.



4 Connect the power cable.



- 5 Press the power button.



- 6 Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.



NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

- 7 Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps



Dell Product Registration

Register your computer with Dell.



Dell Help & Support

Access help and support for your computer.



SupportAssist

Pro-actively checks the health of your computer's hardware and software. The SupportAssist OS Recovery tool troubleshoots issues with the operating system. For more information, see the SupportAssist documentation at www.dell.com/support.



NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.



Dell Update

Updates your computer with critical fixes and latest device drivers as they become available.



Dell Digital Delivery

Download software applications, which are purchased but not pre-installed on your computer.

- 8 Create recovery drive for Windows.



NOTE: It is recommended to create a recovery drive to troubleshoot and fix problems that may occur with Windows.

For more information, see [Create a USB recovery drive for Windows](#).

Identifier	GUID-2D4FD3BB-D11E-4568-9B46-51EF228459EA
Status	Released

Create a USB recovery drive for Windows

Create a recovery drive to troubleshoot and fix problems that may occur with Windows. An empty USB flash drive with a minimum capacity of 16 GB is required to create the recovery drive.



NOTE: This process may take up to an hour to complete.



NOTE: The following steps may vary depending on the version of Windows installed. Refer to the [Microsoft support site](#) for latest instructions.


- 1 Connect the USB flash drive to your computer.
- 2 In Windows search, type *Recovery*.
- 3 In the search results, click **Create a recovery drive**.
The **User Account Control** window is displayed.
- 4 Click **Yes** to continue.
The **Recovery Drive** window is displayed.
- 5 Select **Back up system files to the recovery drive** and click **Next**.
- 6 Select the **USB flash drive** and click **Next**.
A message appears, indicating that all data in the USB flash drive will be deleted.
- 7 Click **Create**.
- 8 Click **Finish**.

Identifier	GUID-1830ED76-0D0D-4DCE-8DEE-EC5C633533F2
Status	Released

Views

Identifier	GUID-EC764194-EBC7-4C09-8D13-101FF605A411
Status	Released

Front

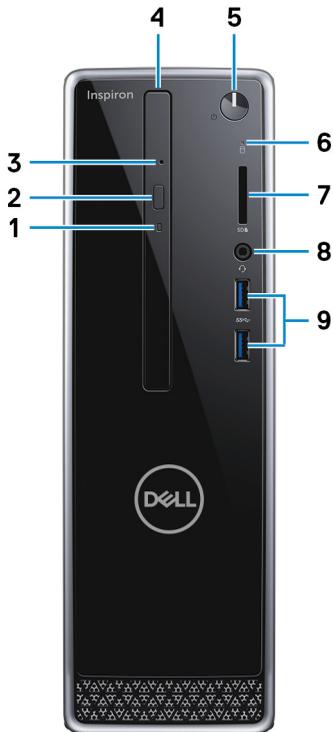

1 Optical-drive activity light

Turns on when the computer reads from or writes to the optical disc.



2 **Optical-drive eject button**

Press to open the optical drive tray.

3 **Optical-drive emergency eject pinhole**

Used to eject the optical-drive tray manually if the optical-drive eject button fails.



NOTE: For more information about manually ejecting optical-drive trays, see the knowledge base article [SLN301118](https://www.dell.com/support) at www.dell.com/support.

4 **Optical drive (optional)**

Reads from and writes to CDs and DVDs.

5 **Power button**

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

Press to put the computer in sleep state if it is turned on.

Press and hold for 4 seconds to force shut-down the computer.



NOTE: You can customize the power-button behavior in Power Options. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

6 **Hard-drive activity light**

Turns on when the computer reads from or writes to the hard drive.

7 **Media-card reader**

Reads from and writes to media cards.

8 **Headset port**

Connect headphones or a headset (headphone and microphone combo).

9 **USB 3.1 Gen 1 ports (2)**

Connect peripherals such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.


Identifier

GUID-DAEFD3A3-C2D1-4C17-98FE-4179CD2B770D

Status

Released

Back

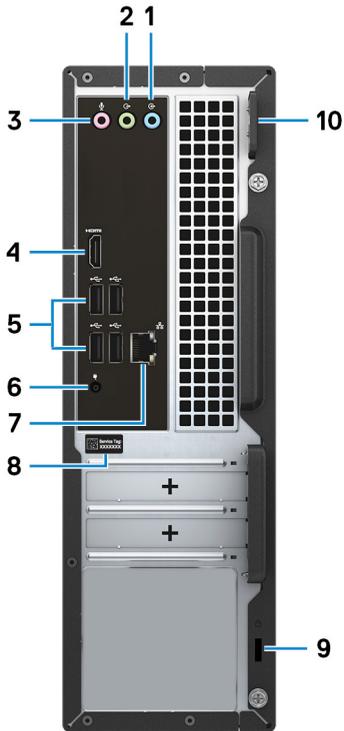

1 **Line-in port**

Connect recording or playback devices such as a microphone or CD player.

2 **Line-out port**

Connect speakers.

3 **Microphone port**

Connect an external microphone to provide sound input.

4 **HDMI port**



Connect a TV or another HDMI-in enabled device. Provides video and audio output.

5 **USB 2.0 ports (4)**

Connect peripherals such as storage devices and printers. Provides data transfer speeds up to 480 Mbps.

6 **Power-adaptor port**

Connect a power adaptor to provide power to your computer.

7 **Network port (with lights)**

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

The two lights next to the connector indicate the connectivity status and network activity.

8 **Service Tag label**

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

9 **Security-cable slot (for Kensington locks)**

Connect a security cable to prevent unauthorized movement of your computer.

10 **Padlock rings**

Attach a standard padlock to prevent unauthorized access to the interior of your computer.

Identifier	GUID-E1BA77B3-C94D-4553-BF74-13EFA6C5A6A6
Status	Released

Specifications

Identifier	GUID-FD45B919-0BCE-4C0A-A2D7-5BE62A1B3739
Status	Released

Computer model

Inspiron 3472

Identifier	GUID-FF727E8E-E481-49D6-907C-1757C79849CA
Status	Released

System information

Table 2. System information

Processor	<ul style="list-style-type: none">• Intel Celeron• Intel Pentium
Chipset	Integrated in the processor

Identifier	GUID-D6590790-DFCF-4CBA-AB31-26799B8A4B96
Status	Released

Operating system

Operating systems supported:

- Windows 10 Home (64-bit)
- Windows 10 Professional (64-bit)
- Ubuntu



Identifier	GUID-0FD4D86A-120E-44F3-8122-9E2CF27E8849
Status	Released

Dimensions and weight

Table 3. Dimensions and weight

Height	290 mm (11.42 in)
Width	92.60 mm (3.65 in)
Depth	292 mm (11.50 in)
Weight (approximate)	3.40 kg (7.50 lb)



NOTE: The weight of your computer varies depending on the configuration ordered and the manufacturing variability.

Identifier	GUID-0F3CC35E-8C93-4D44-95FA-C85C1052CC2A
Status	Released

Memory

Table 4. Memory specifications

Slots	One SODIMM slot
Type	DDR4
Speed	2400 MHz
Configurations supported	4 GB and 8 GB

Identifier	GUID-577D8FF6-62F6-438E-9B5F-282F80F6FB0F
Status	Released

Ports and connectors

Table 5. Ports and connectors

External:

Network	One RJ45 port
USB	<ul style="list-style-type: none"> • Four USB 2.0 ports • Two USB 3.1 Gen 1 ports
Audio/Video	<ul style="list-style-type: none"> • One headset port • One microphone port • One line-out port • One line-in port • One HDMI-out 1.4 port

Internal:

M.2 card	One M.2 card slot for Wi-Fi and Bluetooth combo card
----------	--

Identifier	GUID-5591B3DA-6299-4385-9BE9-2F1A6B3C88C9
Status	Released

Communications

Table 6. Supported Communications

Ethernet	10/100/1000 Mbps Ethernet controller integrated on system board
Wireless	<ul style="list-style-type: none"> • Wi-Fi 802.11b/g/n • Bluetooth 4.0



Identifier	GUID-6BCE8E03-64C7-4D7D-89C7-2475DEFE2D62
Status	Released

Wireless

Table 7. Wireless

Transfer rate	433 Mbps
Frequency Bands	2.4 GHz/5 GHz
Encryption	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP

Identifier	GUID-C65A3FB2-38CE-4079-9E8A-2FF56844B6AE
Status	Released

Audio

Table 8. Audio specifications

Controller	Realtek ALC3820
Type	Integrated 5.1 channel Intel High Definition Audio

Identifier	GUID-B28BF131-A104-4E1B-82B4-70434958F863
Status	Released

Storage

Your computer supports one hard drive and an optional optical drive.

Table 9. Storage specifications

Storage type	Interface type	Capacity
One 2.5-inch/3.5-inch hard drive	SATA AHCI 6 Gbps	Up to 2 TB
One 9.5-mm DVD+/-RW optical drive (optional)	SATA 1.5 Gbps	

Identifier	GUID-468E4421-C8D7-4B49-AD0E-2C6807BEDCC8
Status	Released

Media-card reader

Table 10. Media-card reader specifications

Type	One SD-card slot
Cards supported	SD card

Identifier	GUID-28983774-E001-45FD-B8D1-1B59C7B53389
Status	Released

Power adapter

Table 11. Power adapter specifications

Type	65 W
Diameter (connector)	4.5 mm
Input current (maximum)	1.70 A
Output current (continuous)	3.34 A
Input voltage	100–240 VAC
Input frequency	50–60 Hz
Rated output voltage	19.50 VDC
Temperature range	
Operating	0°C to 40°C (32°F to 104°F)
Storage	–40°C to 70°C (–40°F to 158°F)



Identifier	GUID-FFE3FB69-4C98-4424-9055-257E38F8FFEE
Status	Released

Video

Table 12. Video specifications

	Integrated
Controller	Intel HD Graphics
Memory	Shared system memory

Identifier	GUID-E859261B-1E43-4857-AF24-C5E1B1878B37
Status	Released

Computer environment

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 13. Computer environment

	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
	 NOTE: Maximum dew point temperature = 26°C	 NOTE: Maximum dew point temperature = 33°C
Vibration (maximum)*	0.66 GRMS	1.3 GRMS
Shock (maximum)	110 G [†]	160 G [‡]

* Measured using a random vibration spectrum that simulates user environment.

[†] Measured using a 2 ms half-sine pulse when the hard drive is in use.

[‡] Measured using a 2 ms half-sine pulse when the hard-drive head is in parked position.

Identifier	GUID-AF18382F-D265-43C2-85DA-28FFB5875F37
Status	Released

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 14. Self-help resources

Information about Dell products and services	www.dell.com
Dell Help & Support app	
Tips	
Contact Support	In Windows search, type Contact Support, and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Troubleshooting information, user manuals, setup instructions, product specifications, technical help blogs, drivers, software updates, and so on.	www.dell.com/support
Dell knowledge base articles for a variety of computer concerns.	<ol style="list-style-type: none"> 1 Go to www.dell.com/support. 2 Type the subject or keyword in the Search box. 3 Click Search to retrieve the related articles.



Learn and know the following information about your product: See *Me and My Dell* at www.dell.com/support/manuals.

- Product specifications
- Operating system
- Setting up and using your product
- Data backup
- Troubleshooting and diagnostics
- Factory and system restore
- BIOS information

To locate the *Me and My Dell* relevant to your product, identify your product through one of the following:

- Select **Detect Product**.
- Locate your product through the drop-down menu under **View Products**.
- Enter the **Service Tag number** or **Product ID** in the search bar.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.



NOTE: Availability varies by country and product, and some services may not be available in your country.



NOTE: If you do not have an active internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.