USER MANUAL




Thank you for choosing Better Bathrooms.

Please read this manual before installing your product and keep for future reference.



TOUCH CONTROL LED MIRROR

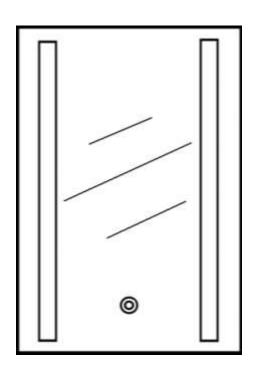

BeBa 24916

- TOUCH CONTROL
- TWO LED LIGHT BARS
- IP44 INGRESS PROTECTION

CONGRATULATIONS ON YOUR PURCHASE

Our aim at Better Bathrooms is to bring you extraordinary bathroom products, for less.

If you're after a modern, traditional, or a totally unique style bathroom, we have the fittings and fixtures to bring your ideas to life, so you can fall in love with your space every day.

We hope you're happy with your new product. But if you experience any problems, we're always here to help.

- Call our friendly UK call centre on 0330 390 3062 (Lines open 9am-4.30pm Monday to Friday, or 9am-2pm Saturday).
- Send us a message via betterbathrooms.com.

CONTENTS


 $C \wedge F F T \vee$

SAFETY	3
BATHROOM ZONES	4
PARTS SUPPLIED	5
TOOLS REQUIRED	5
INSTALLING THE MIRROR	6
PRODUCT OVERVIEW	7
OPERATION	7
CLEANING AND MAINTENANCE	8
TECHNICAL SPECIFICATIONS	8

SAFETY


- The fitting should be installed by a qualified electrician.
- This fitting is only suitable for connection to a 220V~50Hz earthed supply in accordance with current IEE wiring regulations, and should be installed in accordance with local Building Regulations.
- This is for domestic, indoor use only.
- The fitting should be connected to a dedicated lighting circuit which must be protected by a 5-amp fuse (or a 6-amp miniature circuit breaker).
- Before installing the fitting ensure the mains supply is switched off, and that the appropriate fuse is removed (or appropriate circuit breaker is switched off) before commencing installation. Ensure that measures are taken to prevent the supply from being inadvertently reconnected.
- If there is a "Minimum Distance" Label, please do not allow Flammable Materials to rest within that distance from the lamps.
- This product may contain delicate parts be careful during handling and maintenance to avoid breakage.
- If any modification is made to the fitting it will invalidate the warranty and may render the product unsafe.
- A defective appliance may cause electric shock. Never switch on a defective appliance. Unplug the appliance from the mains or switch off at the circuit breaker in the fuse box before seeking assistance.
- This product is IP44 rated, and so no part of the installation is allowed to be within bathroom Zones 0,1. Installation is permitted within Zone 2 and 3.
- This product must be earthed.


BATHROOM ZONES

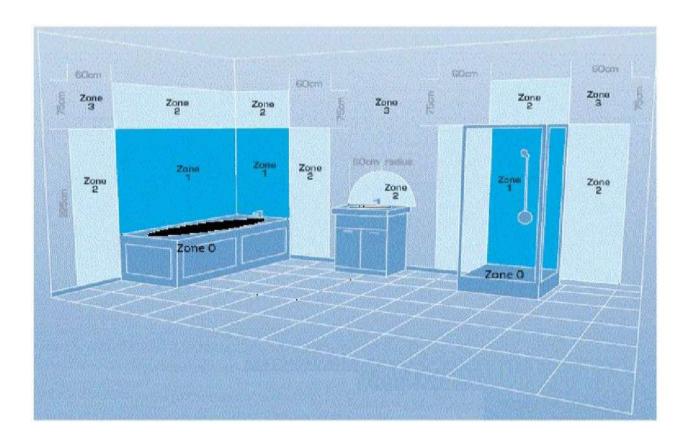

Zone 0:	The interior of the bathtub or shower basin.		
Zone 1:	The area around the bathtub or shower basin up		
	to a height of 2.25m above the floor		
Zone 2:	The area stretching to 0.6m outside the bath or		
	shower and above the bath or shower if over		
	2.25m		

PARTS SUPPLIED







WALL PLUGS (X4)

SCREWS M4 (X4)

PLEASE NOTE: It is the installers responsibility to ensure that the fittings are suitable for the type of wall. Alternative fittings may be required (Not Supplied). If unsure professional advice should be sought.

TOOLS REQUIRED







TAPE MEASURE


SPIRIT LEVEL

ELECTRIC DRILL

SCREWDRIVER








HAMMER

INSTALLING THE MIRROR

The mirror should be hung in portrait orientation. At the back of the mirror, there are 2 key holes on the vertical sides.


To hang the mirror, you will need to drill two holes into the wall, ensuring that there are no wires or pipes behind the wall before commencing.

- 1. Ensure that the power is disconnected at the circuit breaker, and that there is no risk of reconnection during installation.
- 2. Measure the distance between the two key holes.
- 3. Make a note of the distance and mark their position on the wall. Use a spirit level to ensure that the holes are level.
- 4. Drill the 2 holes into the wall at the position marked using a suitable drill bit.
- 5. Insert the wall plugs into the holes.
- 6. Insert the screws into the wall plugs, ensuring their heads are protruding by approximately 3mm.
- 7. Check to ensure the screws line up correctly and the mirror can be safely hung from them.
- 8. The mirror should now be connected to a suitable fuse spur following current regulations and guidance. When connecting ensure that enough cable is left to allow the mirror to be safely removed.
- 9. You will now be able to hang the mirror. Carefully lower the mirror onto the screws, ensuring that is secure and will not slide.
- 10. Reconnect the power supply.

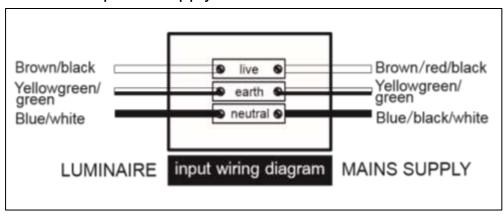



PRODUCT OVERVIEW

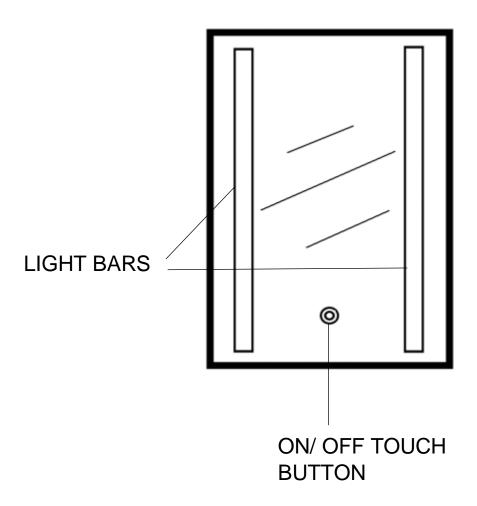

OPERATION

When the mirror is connected and hung securely onto the wall, turn the mains power back on and the mirror will be ready to use.

To operate, use the touch button on the front of the mirror, it is located near the bottom. Touch the button gently to turn on, and press again to switch off.



CLEANING AND MAINTENANCE

Never use products containing bleach or abrasive cleaners, as these will have a detrimental effect on the appearance and lifespan of the product.

Use a clean micro fiber cloth to clean the mirror.

TECHNICAL SPECIFICATION

Model	BeBa_24916
LxHxW (cm)	50x70x4.5
Net Weight (Kg)	5.25
Power Cord length (cm)	65.5
Power	30 W
IP Rating	IP44
Input	220 - 240V, 50 Hz

This product contains a light source of energy efficiency class F.

DISPOSAL

Recycling facilities are now available for all customers at which you can deposit your old electrical products. Customers will be able to take any old electrical equipment to participating sites run by their local councils.

Please remember that this equipment will be further handled during the recycling process, so please be considerate when depositing your equipment. Please contact the local council for details of your local household waste recycling centers.



At the time of printing the product contains no substances listed within Annex XIV of the Reach Regulations (EC) 1907/2006. In accordance with Article 59 of the same regulation the following substances are contained within the product at permitted levels: Cadmium.

As a responsible manufacturer the regulations are monitored to ensure continued compliance. Further information can be provided upon request.



- · visit betterbathrooms.com
- · email customerservices@buyitdirect.co.uk
- · call 0330 390 3062

